


## 3+1 CCTV INDOOR CABLE

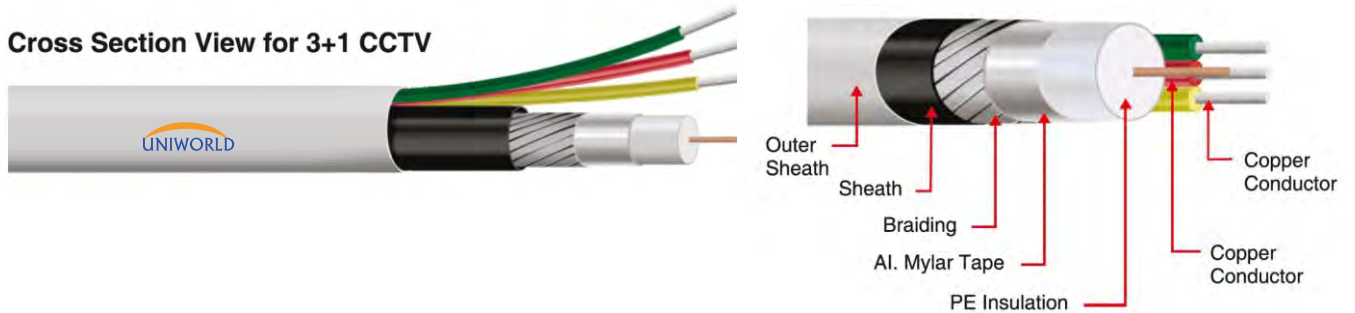

DESCRIPTION	3+1 CCTV INDOOR CABLE	
<b>CONDUCTOR</b>		
Cond. Materials	ANNEALED BARE COPPER	
	POWER AUDIO CORE	VIDEO Co-axial CORE
No of Strands	12 Nos	01
Conductor (mm)	0.100 + 0.01 mm	0.500 + 0.010
<b>INSULATION</b>		
COMPOUND	PVC	LDPE(Low Density Polyethylene )
THICKNESS (MM)	0.40 + 0.05 mm	0.40 + 0.05 mm
DIAMETER (MM)	1.25 + 0.10 mm	1.35 + 0.10 mm
COLOUR (VISUAL)	Red , Yellow ,Grey	Natural
<b>SHIELDED</b>		
Material	N/A	Alloy
Shielding	N/A	48/0.120 + 0.01 mm
<b>Co-AXIAL CORE SHEATHING</b>		
Material	PVC (Polyvinyl chloride)	
THICKNESS (MM)	N/A	0.35 + 0.05 mm
DIAMETER (MM)	N/A	2.70 + 0.20 mm
COLOUR (VISUAL)	N/A	Black
<b>LAID UP</b>	together Red , Yellow ,Grey + Co- axial Core	
<b>SHIELDED</b>		
Material	PVC	
THICKNESS (MM)	0.60 mm Nominal	
DIAMETER (MM)	5.60 + 0.20 mm	
COLOUR (VISUAL)	White	
<b>ELECTRICAL PERFORMANCE</b>		
Conductor Resistance @ 20°C	12/0.100 - 165.0 Ω/Km Max.	1/0.500 - 95.00 Ω/Km Max.
Insulation Resistance	>500 MΩ/Km @ 500 VDC	
High Voltage Test	1.0 Kv Dc/1.50 Kv Ac for 1 Minute (Withstood)	